



Application of the MCNPX-McStas interface for shielding and background calculations at ESS

Klinkby, Esben Bryndt; Willendrup, Peter Kjær; Bergbäck Knudsen, Erik; Lauritzen, Bent; Nonbøl, Erik; Bentley, P.; Fliges, U.

Publication date:
2013

Document Version
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

Citation (APA):
Klinkby, E. B., Willendrup, P. K., Bergbäck Knudsen, E., Lauritzen, B., Nonbøl, E., Bentley, P., & Fliges, U. (2013). *Application of the MCNPX-McStas interface for shielding and background calculations at ESS*. Poster session presented at International Conference on Neutron Scattering 2013, Edinburgh, United Kingdom.

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.



ESS

The European Spallation Source (ESS), presently starting construction in Lund, Sweden, will be the most intense source of spallation neutrons ever built[1]. Protons from a 5MW, 2.5GeV linear accelerator will impact a rotating tungsten target in 14, 2.86ms long pulses every second. The spallation neutrons hereby created are thermalized in water and some of them are further cooled in liquid para-hydrogen before extracted through individual beam-lines serving 22 cold/thermal instruments. To fully exploit the long pulse characteristics, many instruments benefit from being long - up to ~200m is foreseen.

→ Guide design challenging and important, since guides and in particular their shielding is a major cost driver for the ESS facility



McStas Scatter logger

Useful to have a tool that:

- Can monitor where in a guide neutrons are lost
- Allows to optimize reflectivity requirements along a guide
- Serves as an input for dose-rate calculations along guide (n,γ)
- Works within the work-flow accustomed to instrument designers (McStas)


McStas Scatterlogger is the backbone that facilitates these calculations

At each scattering for any McStas component (e.g. a guide) the incoming a outgoing neutron state can be temporarily stored and analyzed

At each scattering:


Incomming state: $n_{in} = (x, v_{in}, t, w_{in})$
Transmitted state: $n_{trans} = (x, v_{in}, t, w_{trans})$
Reflected state: $n_{refl} = (x, v_{out}, t, w_{in} - w_{trans})$

All states available for post-processing

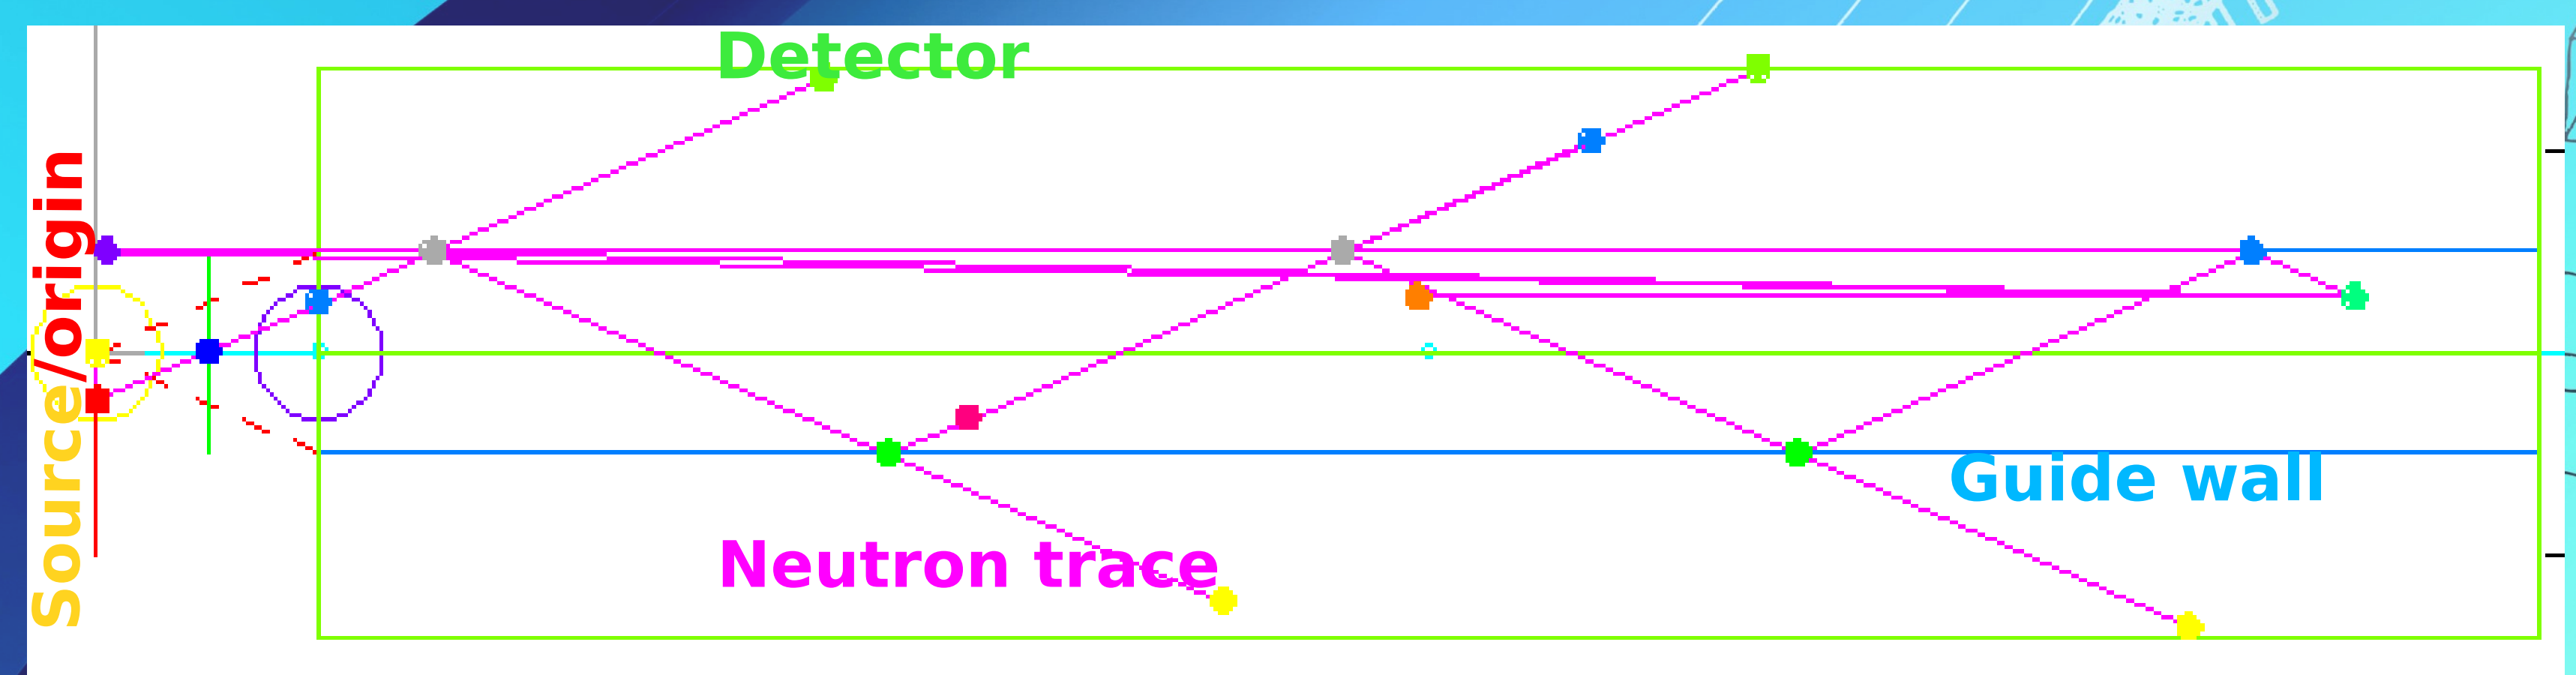

Visualization of a neutron trajectory in a guide. At each scattering both the reflected and transmitted neutron weight is available for post-processing


Use-case 1: Lost intensity

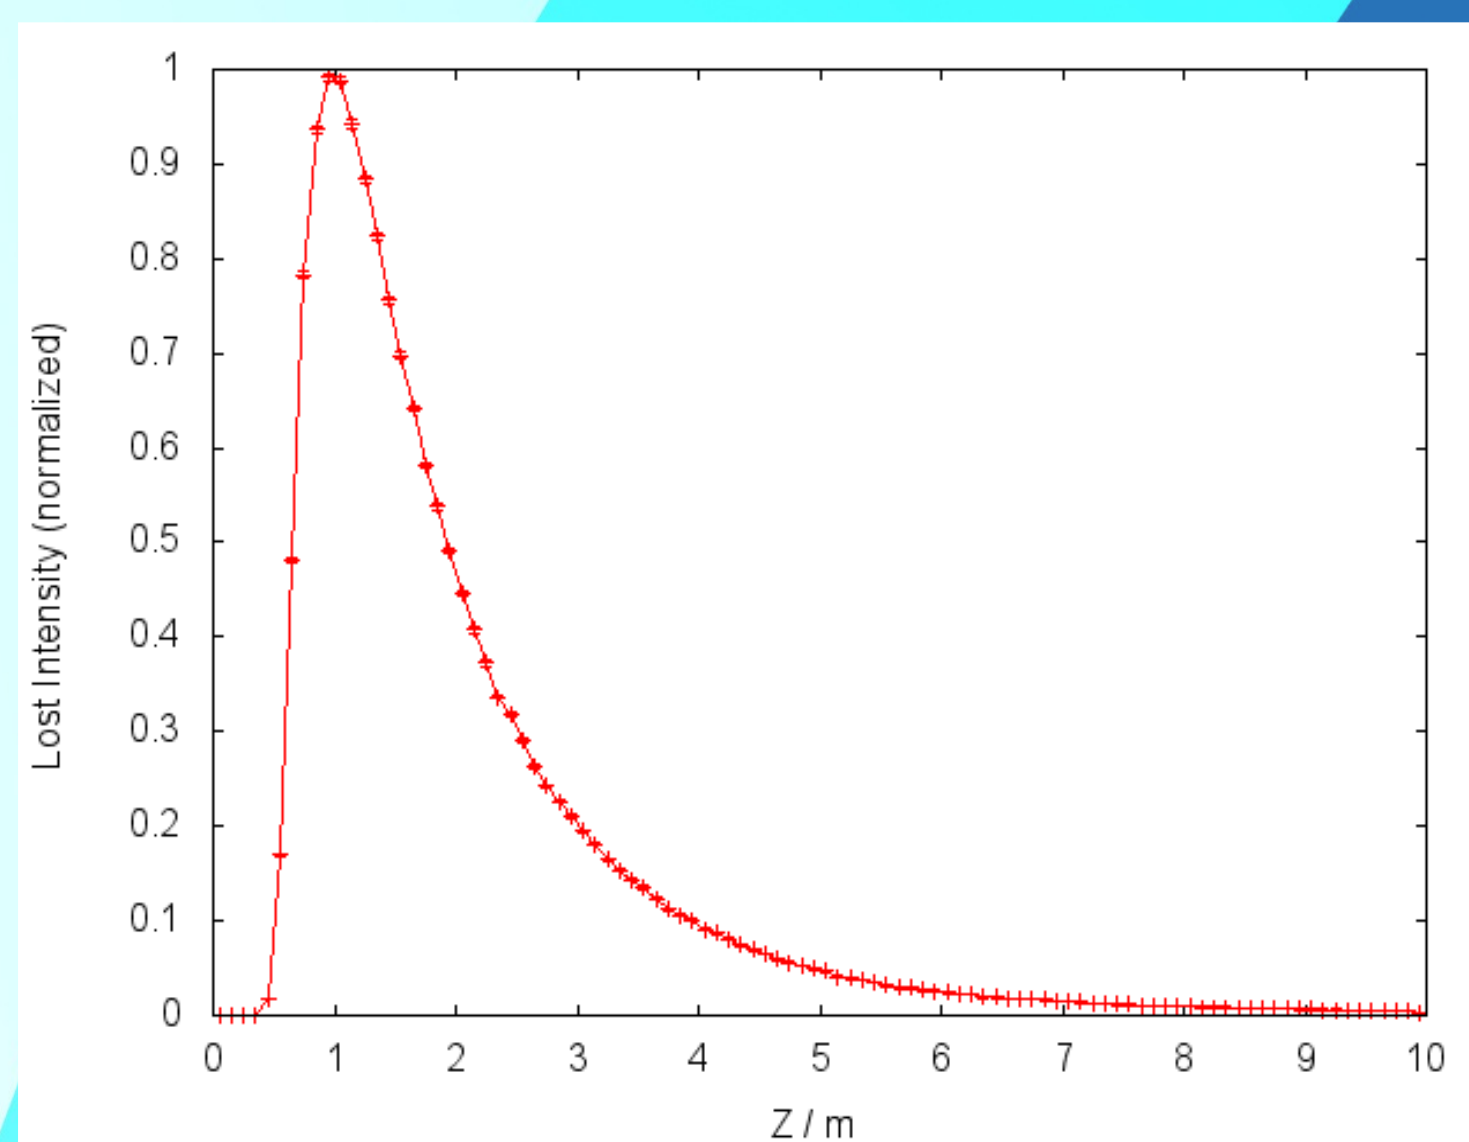

Lost intensity along a 10m straight guide


To which extent intensity is lost, depends strongly on specific guide design, and incoming neutrons (i.e. source) spectrum and divergence.

Use-case 2: Reflectivity

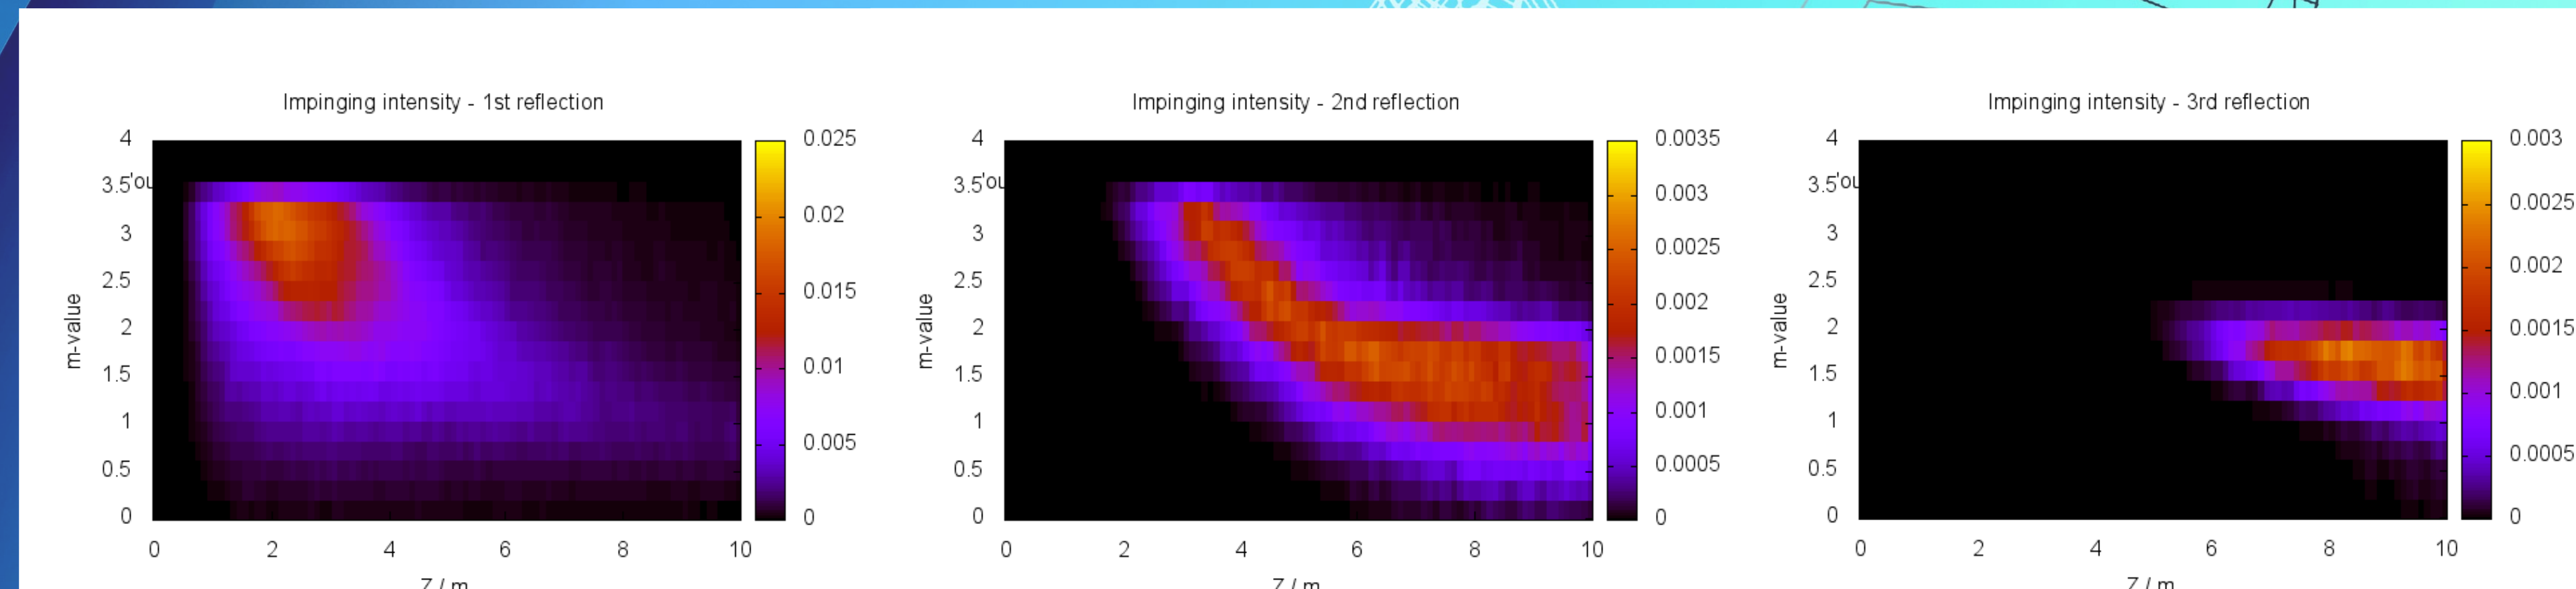

Minimum m-value required for neutrons to reflect along a 10 m guide, and corresponding intensity (color coded). Note that the guide has m=2, which explains the loss of intensity between the first, second and third scattering

- Neutrons are reflected if the energy/incident angle is low enough.
- Given a neutron state and a guide geometry, m_{min} can be calculated at a scattering: The minimum mirror reflectivity requirement which would reflect the neutron.

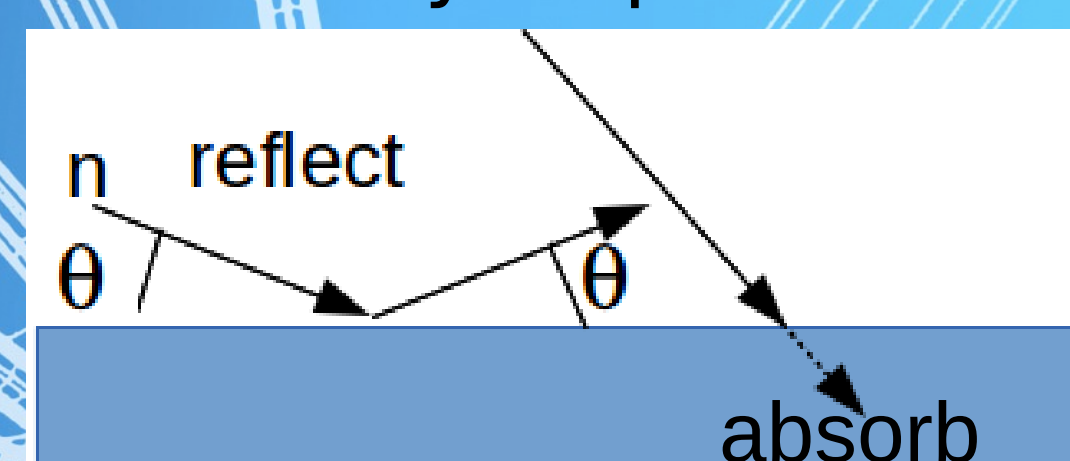


$$\cos 2\theta = (\vec{v}_{in} \cdot \vec{v}_{out}) / |\vec{v}_{in}|^2$$

$$k = |\vec{v}_{in}| \cdot m / \hbar$$


$$m_{min} = 2 \cdot k \cdot \sin(\theta) / 0.0219$$

- Result depends on guide design, and incoming neutrons divergence and energy (i.e. depends on the source)

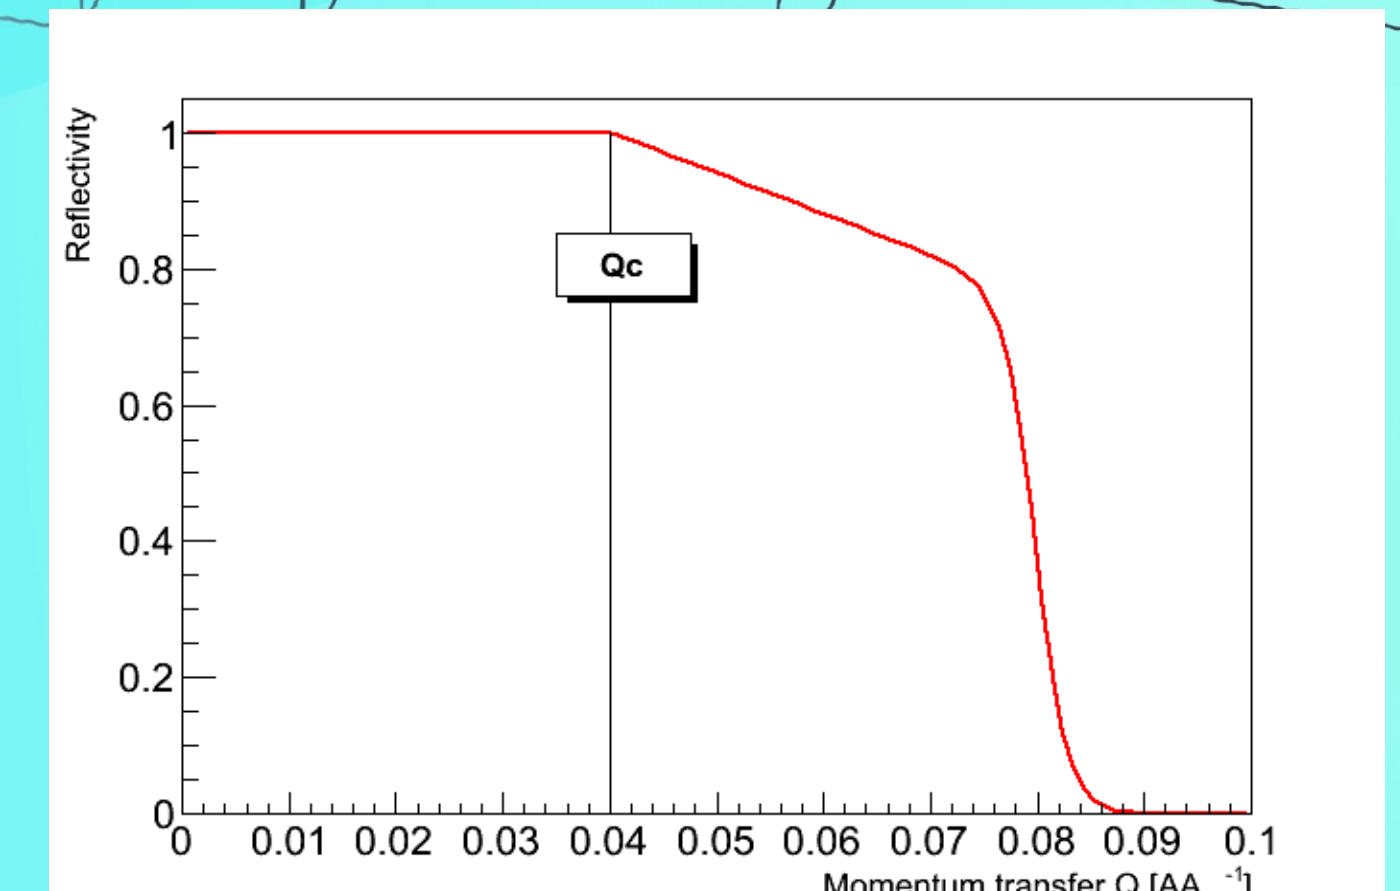




Reflectivity as a function of momentum transfer.

Use-case 3: Background along guides

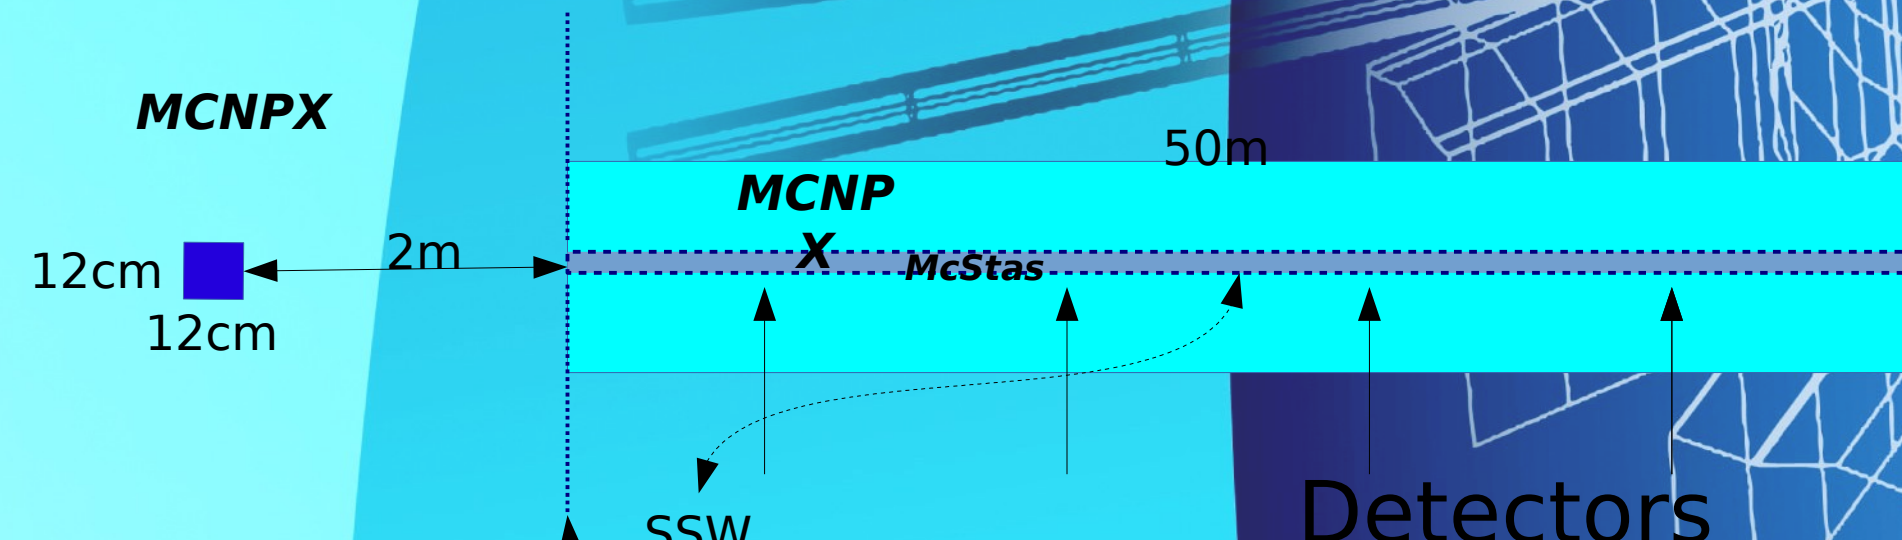

Geometry setup. 50m curved guide (r=1500m) in a steel housing. Beam divergence: 5%, preliminary ESS source spectrum. Detectors are placed 5cm into the steel.

- Neutrons generated with MCNPX
- Handed to McStas through SSW interface [2]
- Unreflected neutrons returned to MCNPX for dose-rate calculation, using the same interface

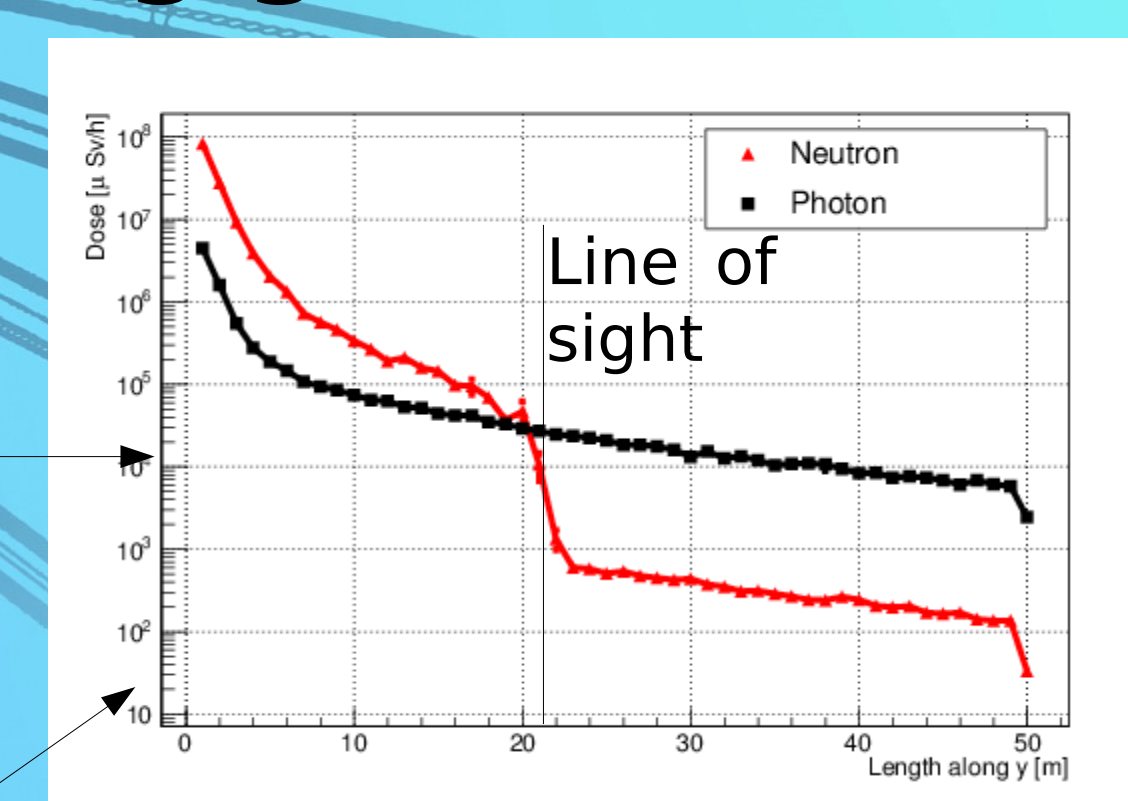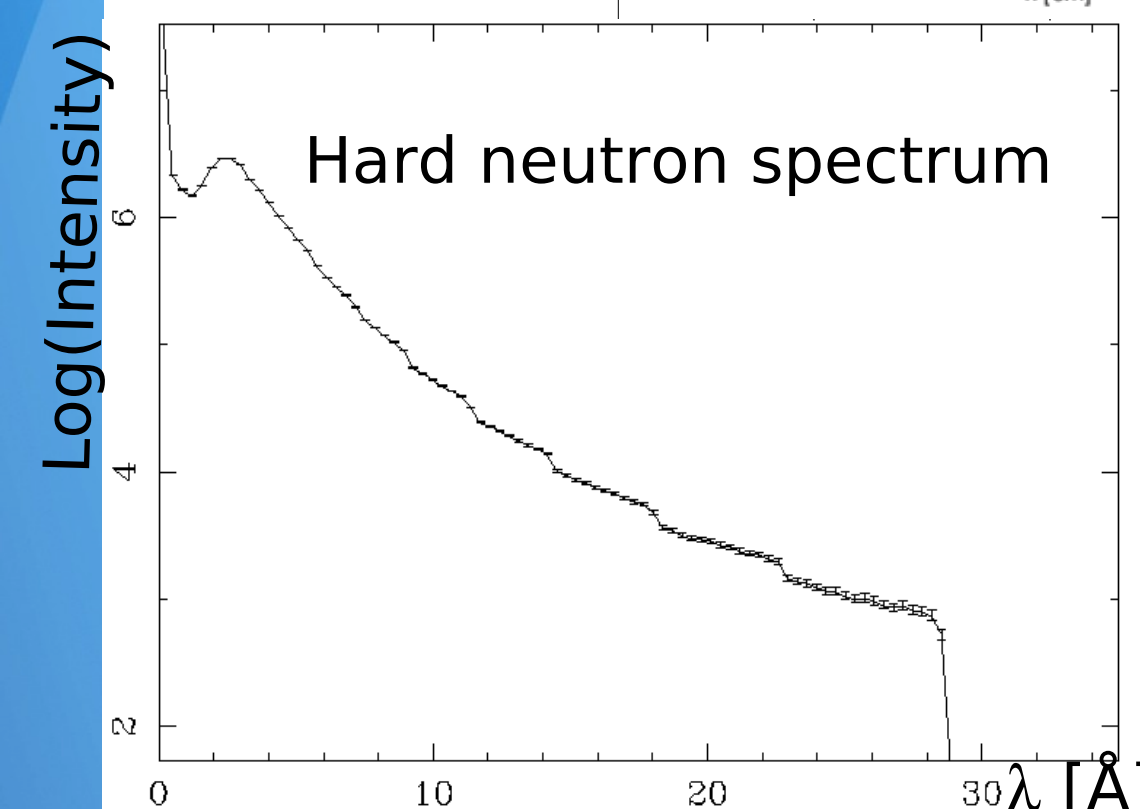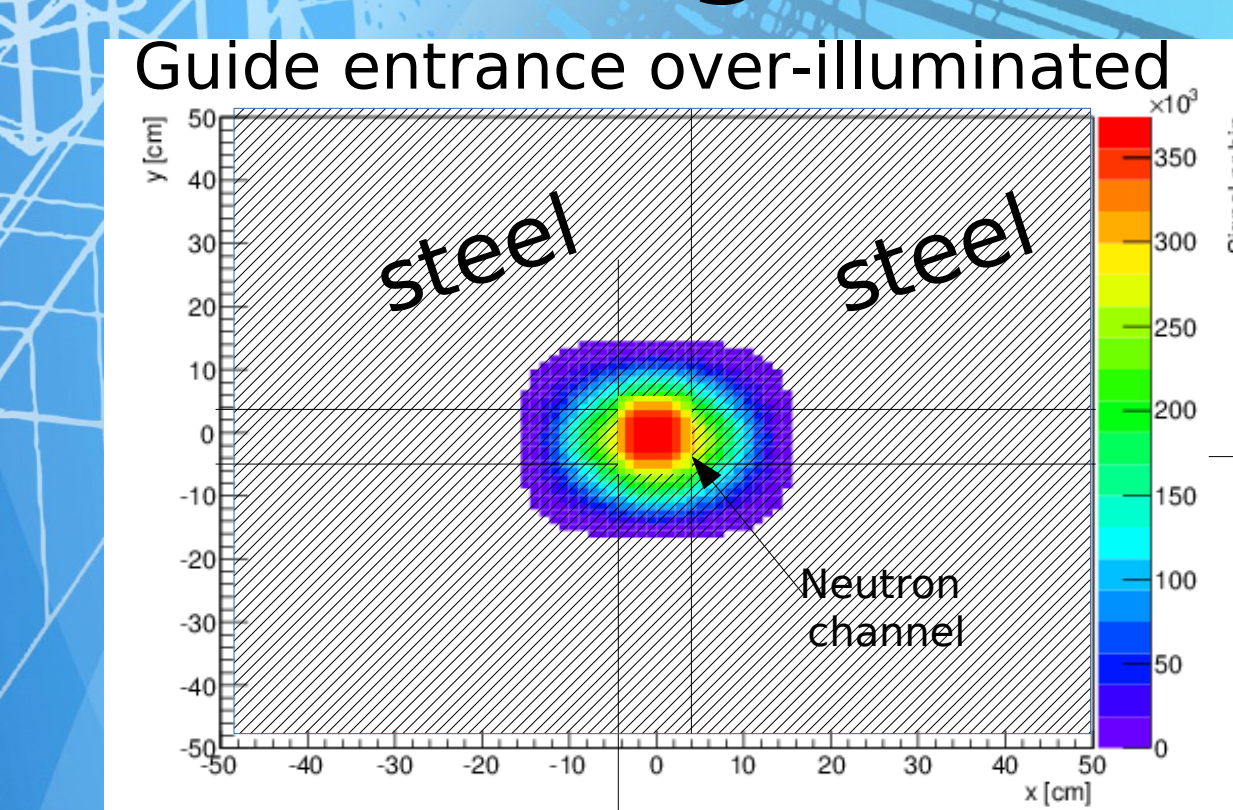

Up: Dose-rate from neutrons and photons separately. The curve corresponding to neutrons drops when line-of-sight is reached. Due to over-illumination of the guide entrance by energetic neutrons, no similar drop is seen in photon induced dose-rate.

Right: Limiting to 0.5-1.0Å neutrons, the drop is also observed for photons

Logging mechanism useful for guide design:

- Monitor lost intensity
- Optimize use of high/low reflectivity mirrors
- Shielding along guide
- Works from within common tool: McStas

